


DIMENSIONS & CAPACITIES

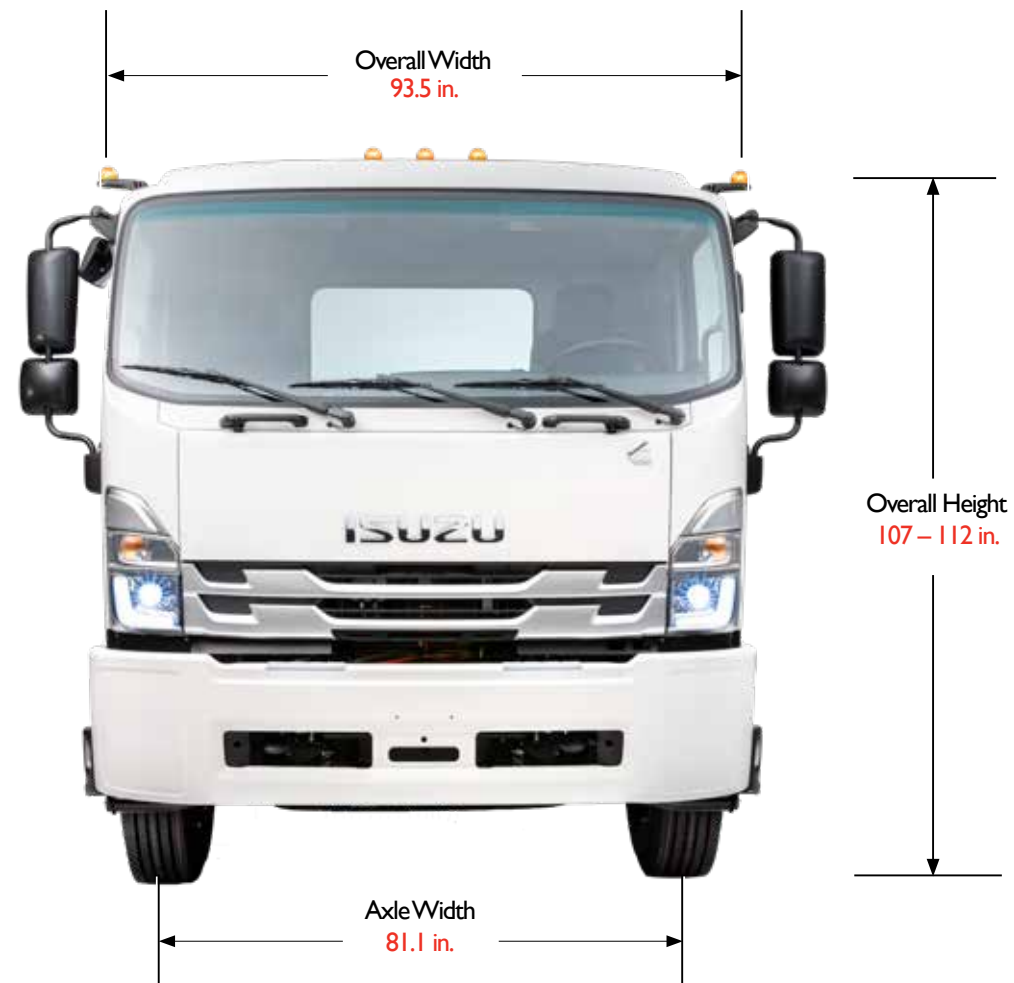

Wheelbase (in.)	Cab to Axle (in.)	Cab to End of Frame (in.)	Back of Cab (in.)	Overall Length (in.)
152	127.0	192.9	10.4	274.4
170	145.0	220.0	10.4	301.5
188	163.0	247.0	10.4	328.5
200	175.0	264.9	10.4	346.4
212	187.0	283.1	10.4	364.6
224	199.0	301.0	10.4	382.5
236	211.0	319.1	10.4	400.6
248	223.0	337.0	10.4	418.5

SPECIFICATIONS

	FTR	FVR (De-Rated)	FVR
Class	6	6	7
GVWR	25,950 lbs.	25,950 lbs.	33,000 lbs.
GCWR	30,000 lbs.	33,000 lbs.	33,000 lbs.
Wheelbases	8	8	8
Front GAWR	12,000 lbs. 11,000 lbs. (Low Pro)	12,000 lbs. (Low Pro N/A)	12,000 lbs. (Low Pro N/A)
Rear GAWR	19,000 lbs.	21,000 lbs.	21,000 lbs.
Engine Cummins B6.7L	HP: 260 @ 2,400 RPM Torque: 660 lb-ft @ 1,600 RPM	HP: 260 @ 2,400 RPM Torque: 660 lb-ft @ 1,600 RPM	HP: 260 @ 2,400 RPM Torque: 660 lb-ft @ 1,600 RPM
Transmission	Allison® 2550 RDS (Includes Park Pawl)	Allison® 2500 RDS (No Park Pawl)	Allison® 2500 RDS (No Park Pawl)
Final Ratio	5.57 4.88 (Low Pro)	5.57 (Low Pro N/A)	5.57 (Low Pro N/A)
Alternator	160-amp	160-amp	160-amp
Air Compressor	17 CFM	17 CFM	17 CFM
Cummins Exhaust	10-gallon DEF Tank	10-gallon DEF Tank	10-gallon DEF Tank
Brakes	Air-S-Cam Drum	Air-S-Cam Drum	Air-S-Cam Drum
Tires Low Pro	11R22.5 255/70R22.5	11R22.5 N/A	11R22.5 N/A